


BALDWIN CREEK DELL HAVEN BASIN

Project Goals



Decrease downstream flooding

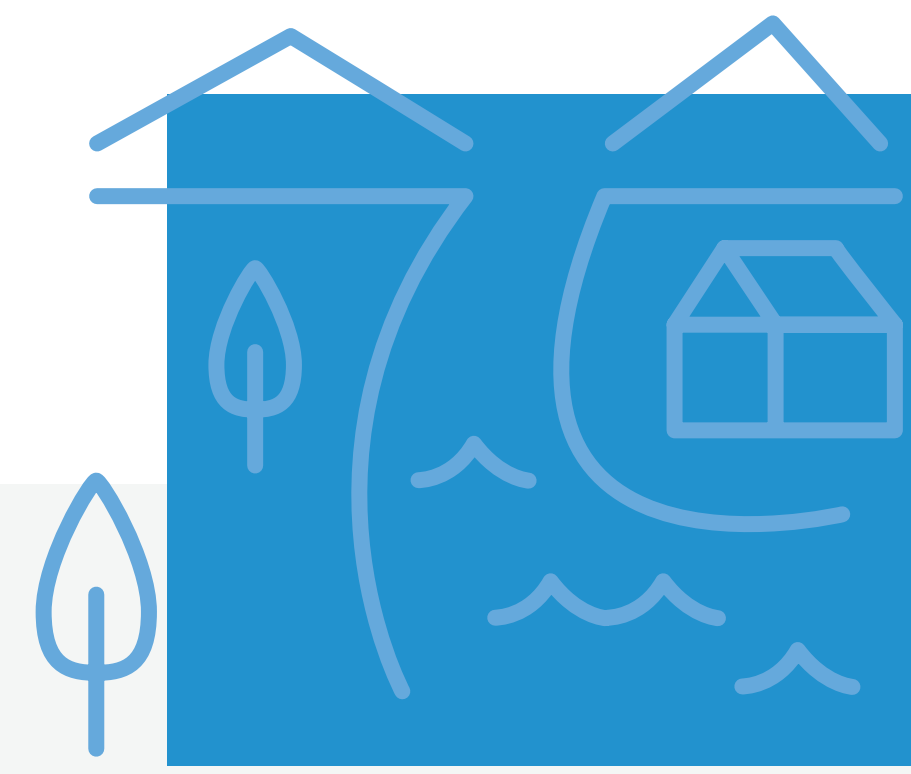

Improve water quality

Project Area

Anticipated Project Timeline

- Planning**
Nov. 2020 to Feb. 2023
- Design**
Feb. 2023 to May 2024
- Construction Start**
Late 2024 - Early 2025

The proposed 21.2-acre dry detention basin will receive stormwater runoff from approximately 188 acres and will provide active storage for the 100-year design storm event. Two storm sewers will be daylighted to discharge into the basin. The basin will discharge detained runoff back into the existing outlet storm sewer.

